

# HearthMaster™ Log Lighter Kit



## PF-941-L2 LP Gas (Propane) Log Lighter Bar

ITEM # SUBMITTED: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

PO #: \_\_\_\_\_

TAG: \_\_\_\_\_

### APPLICATION

The HearthMaster™ PF-941-L2 Log Lighter Bar is a convenient way to achieve a crackling wood fire quick and easy. This bar is for with LP (Propane) Gas applications **ONLY** (use *HearthMaster™ PF-940-10 for Natural Gas Applications*).

### INSTALLATION

Product installation and system testing shall be in accordance with NFPA 54/ANSI Z223.1 (National Fuel Gas Code), state/local codes and the manufacturer's instructions. A HearthMaster™ Keyed Valve (PF-952 or PF-954 series must be installed upstream (within 6 feet) of the log lighter.



### MATERIALS

Mixing Chamber: Malleable Iron with 2 inlet ports (A & B in diagram)

Burner Bar: Carbon Steel with 15 Flame Ports

### SPECIFICATIONS

APPROVED GASES: **LP (PROPANE) GAS ONLY**

MAX WORKING PRESSURE: 1/2 PSIG

MAX TESTING PRESSURE: 10 PSI

BTU/H RATING: 20,000

### DIMENSIONS:


OVERALL LENGTH: 20"

MIXING CHAMBER LENGTH: 3 1/4"

MIXING CHAMBER HEIGHT: 2"

INLET THREADS (A&B) 1/2" FIP

BURNER BAR THREADS 3/8" MIP

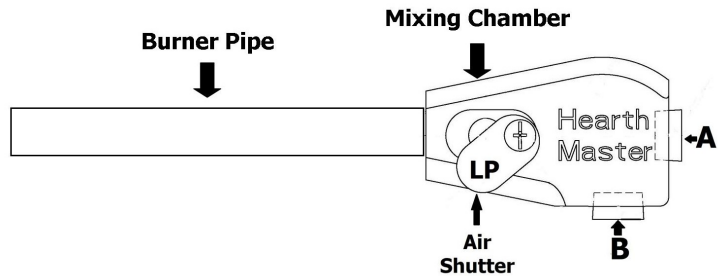

Rev. 3.23

Pro-Flex™  
Traditional CSST

FlakJacket™  
Arc-Resistant CSST

HearthMaster™  
Fireplace & Log Lighter  
Valves, Bars, etc.

Pro-Poly™  
Underground Gas  
Piping System



Pro-Flex, LLC • P: 877.798.6291 • F: 765-798-6139 • E: sales@proflexcsst.com