

# Pro-Flex™ Coupler Fitting



## PECP2-Series

ITEM # SUBMITTED: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

PO #: \_\_\_\_\_

TAG: \_\_\_\_\_

### APPLICATION

The Pro-Poly™ Poly Coupler Fitting is used join together 2 MDPE Gas pipes of the same size.

### INSTALLATION

Product installation and system testing shall be completed by a qualified installer in accordance with NFPA 54/ANSI Z223.1 (National Fuel Gas Code), National Gas & Propane Installation Code B149.1 (Canada), state/local codes and the Pro-Flex Installation/ Training Guide.

### MATERIALS

**Nut and Main Body:** Polypropylene

**O-Ring:** Nitrile

**Spacer:** Nylon

**Grip Ring:** Acetal

**Stiffener:** Acetal



### SPECIFICATIONS

APPROVED GASES: **LP (PROPANE) & NATURAL GAS**

MAX WORKING PRESSURE: 80 PSIG


MAX TESTING PRESSURE: 120 PSIG

### CODES, STANDARDS & LISTINGS:

**Codes:** NFPA 54, ICC Codes [IFGC, IRC, IPC, IMC], UPC, UMC

**Standards:** ASTM F1924-10218

**Listings:** IAPMO

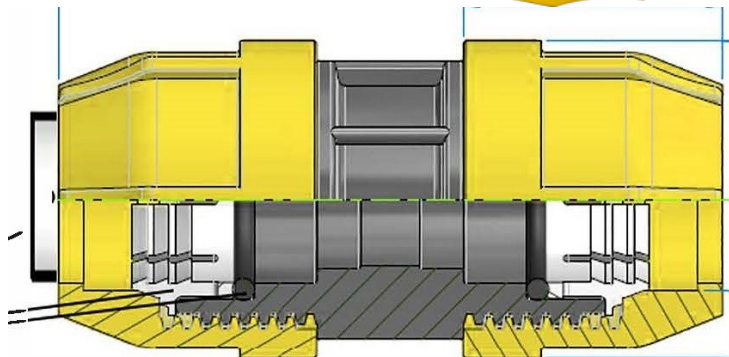

### DIMENSIONAL DATA:

Item Number	Qty per Box	Poly Pipe Size
PECP2-12CTSC	6	1/2" CTS .625" x .090
PECP2-34C	6	3/4" IPS SDR 11
PECP2-01C	6	1" IPS SDR 11
PECP2-0114C	1	1 1/4" IPS SDR 11
PECP210-0114C	1	1 1/4" IPS SDR 10
PECP2-015C	1	1 1/2" IPS SDR 11
PECP2-02C	1	2" IPS SDR 11



**Pro-Flex™**  
Traditional CSST

Pro-Flex LLC

**FlakJacket™**  
Arc-Resistant CSST

www.proflexcsst.com

**HearthMaster™**  
Gas Valves, Keys & Bars

1-877-798-6291

**Pro-Poly™**  
Underground Gas Piping